

ELITE
WOODWORKING MACHINERY

THE FUTURE OF WOODWORKING IN EDUCATION



Our education-dedicated machines are built with safety, reliability, and durability in mind. Backed by expert installation and ongoing support, we help schools create the best possible learning environment for their students.

BEYOND THE MACHINE:

- ☑ After-Sales Support
- ☑ Annual Service & Inspection Packages
- ☑ Extended 5 Year Warranty
- ☑ Blade Sharpening Service

TALK TO US TODAY ABOUT UPGRADING YOUR SCHOOL'S WORKSHOP

info@elitewoodworkingmachinery.ie



PROUD SPONSPORS OF TechnoTeachers Association

SUPPORTING YOUNG PEOPLE IN SECURING APPRENTICESHIPS WAY WORK

ELITE
WOODWORKING MACHINERY



TABLE OF CONTENTS

1 24" BANDSAW

2 20" BANDSAW

3 18" BANDSAW

4 16" BANDSAW

5 12" COMPACT PANEL SAW

6 12" JUMBO PANELS SAW

7 16" PLANER THICKNESSER

8 MID CNC ROUTER

9 SPINDLE MOULDER

10 DRILL PRESS

BUILT WITH PRECISION.
DRIVEN BY RELIABILITY.

ELITE
WOODWORKING MACHINERY



TABLE OF CONTENTS

11 30 X 40 LATHE

12 18 X 24 LATHE

13 14 X 20 LATHE

14 10x18 LATHE

15 CYCLONE DUST COLLECTOR

16 BELT DISC SANDER

17 AIR CLEANER

18 HANDSAFE SYSTEM

19 MOBILE DUST EXTRACTION

20 WHY CHOOSE US

BUILT WITH PRECISION.
DRIVEN BY RELIABILITY.

ELITE
WOODWORKING MACHINERY

24” BANDSAW

THE PERFECT COMBINATION
OF TECHNOLOGY & PRECISION



The 24" Bandsaw is designed to perform reliably in high-use workshop environments where consistency and durability are essential.


Its box-style welded spine supports the machine through continuous, heavy-duty operation. Solid cast iron bandwheels ensure smooth blade travel and reduce vibration during cutting.

This bandsaw is built to deliver dependable performance day in, day out.

ELITE
WOODWORKING MACHINERY

BANDSAW

Features

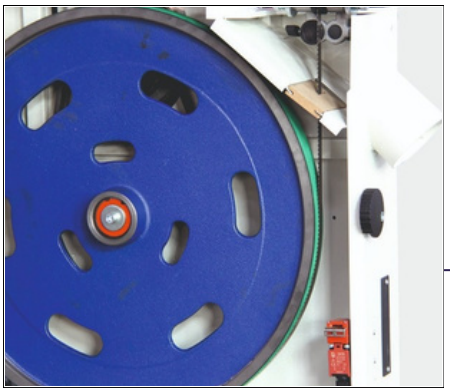

Solid cast iron bandwheel and reliable dual support tension system



European industrial roller blade guide



Heavier box-style, welded spine contributes high strength to accurate cutting.

ELITE
WOODWORKING MACHINERY



EQUIPPED WITH A DUAL SUPPORT TENSION SYSTEM AND EUROPEAN-STYLE ROLLER GUIDES, THE EWM 24" BANDSAW OFFERS EXCELLENT BLADE CONTROL—REDUCING DEFLECTION AND ENHANCING CUTTING ACCURACY.

OVERSIZED TRUNNIONS AND A GEARED TILTING MECHANISM MAKE ADJUSTMENTS EASY AND STABLE. OPERATORS CAN CONFIDENTLY REPOSITION THE TABLE, KNOWING THE SUPPORT SYSTEM IS DESIGNED FOR STRENGTH AND PRECISION.


ELITE
WOODWORKING MACHINERY

TECHINICAL
Specifications

Blade length	4470 mm
Blade width	10–35 mm
Blade speed	1500 m/min
Max depth of cut	370 mm
Throat Width	580mm
Table Size	700x608mm
Table tilt	0–20°
Bandwheel Diameter	610mm
Motor power output	4kW S1
Extractor port diameter	2x100 mm
Safety	Handsafe System – Optional Extra
Net/Gross weight	359 kg

ELITE
WOODWORKING MACHINERY


BANDSAW
Specification

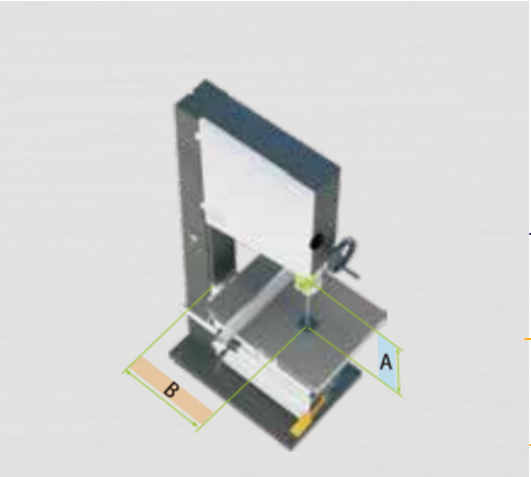

Key Capacity

A: Max Depth of Cut: 335 mm

B: Throat Width: 480 mm

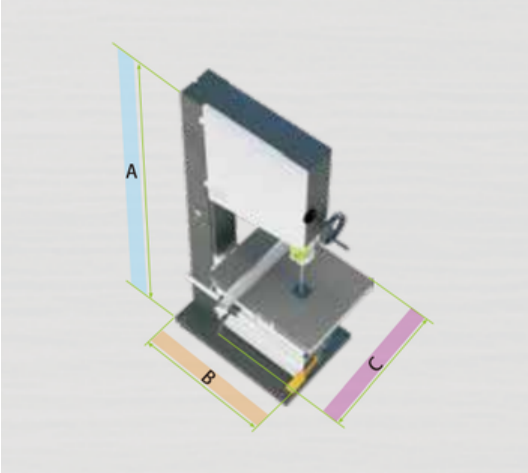

Layout Dimensions

A: 1876 mm

B: 940 mm

C: 803 mm

ELITE
WOODWORKING MACHINERY

18” BANDSAW

ENGINEERED FOR ACCURACY & RELIABILITY



The **EWM 18" Bandsaw** is designed to deliver consistent, accurate cutting performance in everyday workshop environments.

Equipped with a **2 HP motor** and essential **safety systems** as standard, it offers reliable operation for training centres, schools, and general woodworking facilities. Its solid construction and precision-focused components ensure dependable results across a wide range of cutting tasks.

+35316991516

www.elitewoodworkingmachinery.ie

ELITE
WOODWORKING MACHINERY


MACHINE
Features



Reliable dual support blade tension system



Quick blade tension release

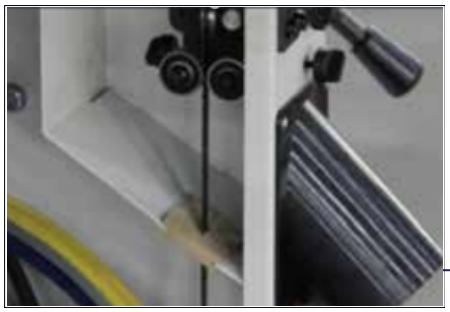

Side mounted dust post with zero clearance insert provides efficient vacuuming



Gear drive table trunnion with quick locking mechanism

ELITE
WOODWORKING MACHINERY



THE DUAL SUPPORT BLADE TENSION SYSTEM AND QUICK TENSION RELEASE MECHANISM PROVIDE CONSISTENT BLADE CONTROL AND FAST ADJUSTMENT, IMPROVING CUTTING ACCURACY AND OPERATIONAL EFFICIENCY.

THE SIDE-MOUNTED DUST POST WITH ZERO-CLEARANCE INSERT MAXIMISES VACUUM EFFICIENCY, WHILE THE GEARED TABLE TRUNNION AND QUICK-LOCKING SYSTEM ALLOW SMOOTH, STABLE ANGLE ADJUSTMENTS FOR PRECISE CUTTING PERFORMANCE.


ELITE
WOODWORKING MACHINERY

TECHINICAL
Specifications

Blade length	3886 mm
Blade width	6–33 mm
Blade speed	400 / 900 m/min
Max depth of cut	330 mm
Throat width	447 mm
Table size	546 × 400 mm
Table tilt	0–45°
Bandwheel diameter	450 mm
Motor power output	2 HP
Extractor port dimensions	2 × 100 mm
Machine dimensions	1910 × 958 × 665 mm
Weight Net /Gross	161 /180 kg
Output	230 V

ELITE
WOODWORKING MACHINERY


MACHINE
Specification

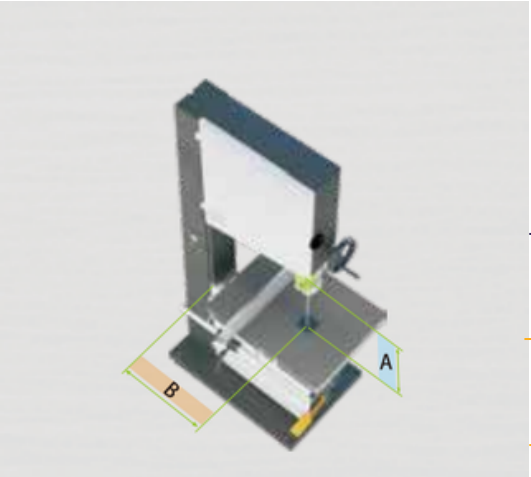

Key Capacity

A Max Depth of Cut: 330 mm

B Throat Width: 447 mm

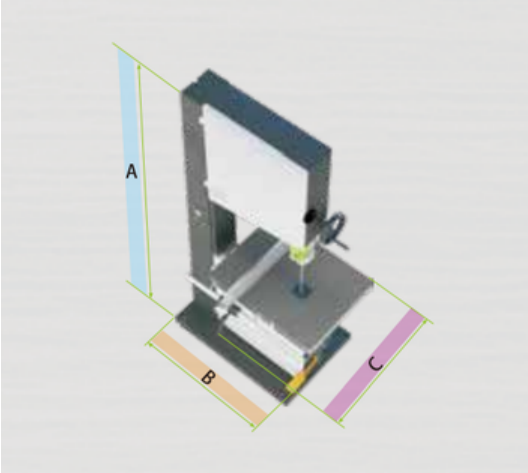

Layout Dimensions

A: 1910 mm

B: 958 mm

C: 665 mm

ELITE
WOODWORKING MACHINERY

20” BANDSAW

FOR DAILY WORKSHOP USE
POWER, PRECISION&CONTROL



The **20" EWM bandsaw** is an ideal choice for educational settings, where safety and reliability are paramount.

This entry-level bandsaw offers a balance of robust performance and enhanced safety features, ensuring a secure and productive woodworking experience. Standard features such as industrial blade guides on the top/bottom, Quick blade tension with indicator, Easy drift fence & gear driving tilting table and so much more!


Whether you’re crafting intricate details or performing heavy-duty cutting, the EWM 20" Bandsaw delivers exceptional performance and reliability, backed by our dedicated after-sales care.

+35316991516

www.elitewoodworkingmachinery.ie

ELITE
WOODWORKING MACHINERY

MACHINE
Features

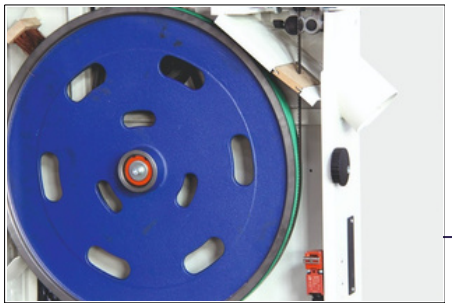

Solid cast iron bandwheel and reliable dual support tension system



Blade quick release with hefty flywheel spring to help the saw withstand greater forces required for tensioning wide blades



European industrial roller blade guide



Oversize casting trunnions that lend solid foundation below and driven by gear for easy tilting

ELITE
WOODWORKING MACHINERY



THE EUROPEAN-STYLE BLADE GUIDE SYSTEM AND CAST IRON BAND WHEELS PROVIDE SMOOTH, CONTROLLED BLADE MOVEMENT—ENHANCING CUTTING ACCURACY AND CONSISTENCY.

THE HEAVY-DUTY TABLE TRUNNION AND GEARED TILTING MECHANISM ALLOW EASY, STABLE AND PRECISE ANGLE ADJUSTMENTS, ENSURING RELIABLE PERFORMANCE IN ANY WORKSHOP SETTING.


ELITE
WOODWORKING MACHINERY

TECHINICAL
Specifications

Blade length	3962 mm
Blade width	6–30 mm
Blade speed	1500 m/min
Max depth of cut	305 mm
Table tilt	0–45 degrees
Motor power	4 HP
Connector ports	2 × 100 mm
Brake	Foot brake
Mitre gauge	300 × 100 × 60 mm
Bandwheel diameter	500 mm
Weight	245 kg

ELITE
WOODWORKING MACHINERY


MACHINE
Specification

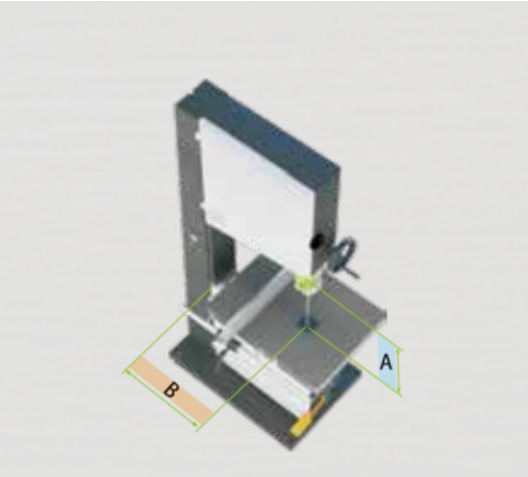

Key Capacity

A Max Depth of CuT: 335 mm

B Throat Width: 480 mm

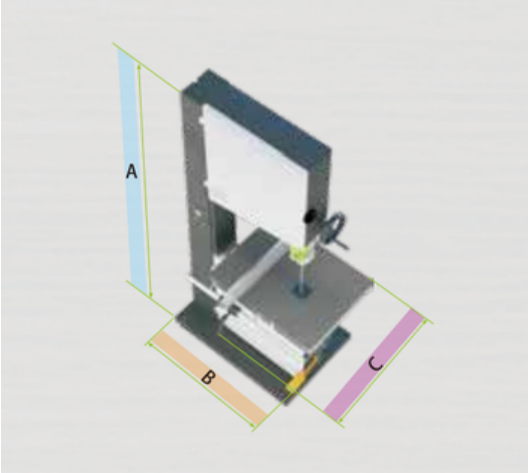

Layout Dimensions

A : 1876 mm

B: 940 mm

C: 803 mm

ELITE
WOODWORKING MACHINERY

16” BANDSAW

FOR DAILY WORKSHOP USE
POWER, PRECISION&CONTROL



The **16" EWM bandsaw** is a versatile, well-equipped bandsaw designed for the serious home workshop. It includes standard industrial-grade features such as bearing blade guides on the top and bottom, a quick blade tension system with indicator, an easy-drift fence, and a geared tilting table. These additions provide the precision, control, and stability needed for demanding woodworking tasks.

With its strong performance, solid construction, and generous cutting capacities, the BS410B delivers the reliability and accuracy expected by discerning woodworkers who require dependable results for both hobby and professional projects.


+35316991516

www.elitewoodworkingmachinery.ie

ELITE
WOODWORKING MACHINERY

MACHINE

Features

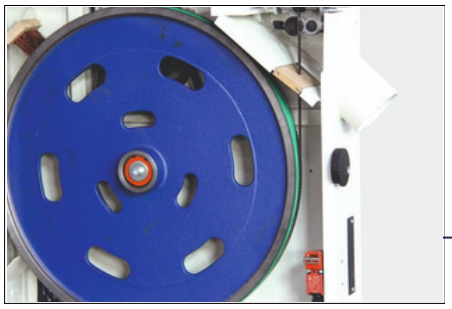

Solid cast iron bandwheel and reliable dual support tension system



Blade quick release with hefty flywheel spring to help the saw withstand greater forces required for tensioning wide blades



European industrial roller blade guide



Oversize casting trunnions that lend solid foundation below and driven by gear for easy tilting

ELITE
WOODWORKING MACHINERY



THE HEAVY-DUTY CAST IRON BANDWHEELS AND DUAL SUPPORT TENSION SYSTEM ENSURE SMOOTH, ACCURATE CUTTING EVEN UNDER HIGH BLADE LOAD.

THE GEARED TILTING TABLE, INDUSTRIAL ROLLER GUIDES, AND QUICK-TENSION MECHANISM PROVIDE PRECISE CONTROL FOR EVERY WOODWORKING PROJECT.


ELITE
WOODWORKING MACHINERY

TECHINICAL
Specifications

Blade Length	3531 mm
Blade Width	6–30 mm
Blade Speed	1200 m/min (1×230 V), 1500 m/min (3×400 V)
Max Depth of Cut	280 mm (bearing guide), 270 mm (European roller guide)
Throat Width	390 mm
Table Size	578 × 420 mm
Table Tilt	0–45°
Bandwheel Diameter	400 mm
Motor Power Output	1.5 kW S1 (1×230 V), 2.2 kW S1 (3×400 V)
Extractor Port Diameter	2 × 100 mm
Net / Gross Weight	170 / 185 kg

ELITE
WOODWORKING MACHINERY


MACHINE
Specification

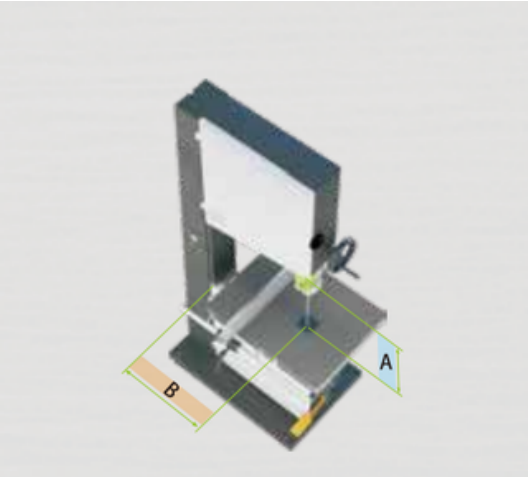

Key Capacity

Max Depth of Cut: 280 mm

Throat Width. 390 mm

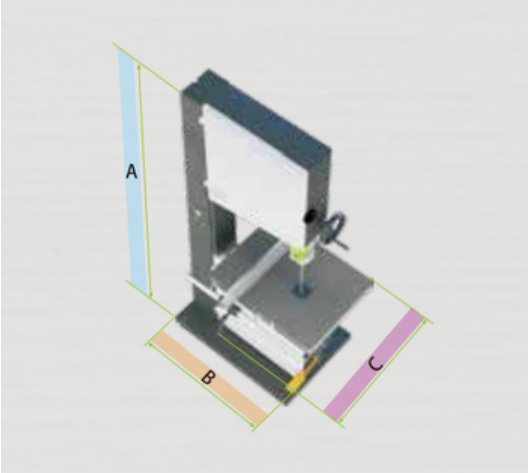

Layout Dimensions

A : 1753 mm

B: 810 mm

C: 748 mm

ELITE
WOODWORKING MACHINERY

12” SLIDING TABLE SAW

COMPACT POWER AND PRECISION
FOR PROFESSIONAL PANEL CUTTING

Not every workshop needs a large industrial panel saw dominating the space, which makes a compact yet fully featured sliding table saw an appealing alternative.

The **12" Sliding Table Saw** meets that demand with a heavily constructed steel chassis and a robust grey cast-iron table that ensures vibration-free operation and long-lasting stability.



Designed to deliver professional-level performance in a smaller footprint, the saw provides smooth, accurate sliding thanks to its precision beam system, while optional accessories expand cutting versatility for workshops handling a range of materials and panel sizes.

+35316991516

www.elitewoodworkingmachinery.ie

ELITE
WOODWORKING MACHINERY

MACHINE
Features




Dual shaft slides saw unit gives extra support for stability and lack of vibration



Large section profile cross cutting fence with reversible fence stops



Reversible saw fence for folding away table for sawing large panels

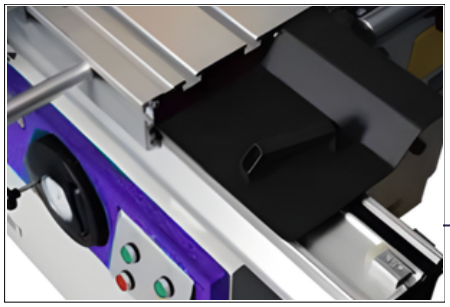

Ball bearing sliding guarantees smooth and precision sliding cutting

ELITE
WOODWORKING MACHINERY

THE HEAVY-GAUGE STEEL CHASSIS AND CAST IRON TABLE PROVIDE EXCEPTIONAL STABILITY AND VIBRATION-FREE CUTTING, DELIVERING ACCURACY FOR EVERY WORKPIECE.



THE PRECISION ENGINEERED SLIDING BEAM, REVERSIBLE FENCE SYSTEM, AND HIGH-SPEED SCORING BLADE ENSURE CLEAN, SMOOTH CUTS ON PANELS OF ALL SIZES.


ELITE
WOODWORKING MACHINERY

TECHINICAL
Specifications

Main Blade Diameter	315 mm
Main Blade Speed	4500 rpm
Scoring Blade Diameter	120 mm
Scoring Blade Speed	8000 rpm
Blade Tilt	0–45°
Max Depth of Cut @ 45°	67 mm
Max Depth of Cut @ 90°	95 mm
Max Rip Capacity	Standard 900 mm, Option 1250 mm
Sliding Beam Size	Standard 1200 × 360 mm, Option 1600 × 360 mm
Sliding Beam Cutting Capacity	Standard 1250 mm, Option 1600 mm
Table Size	800 × 530 mm
Dust Extraction Outlet	120 mm
Main Motor Output	2.5 kW S1 (3×400 V), 4 kW S1 (3×400 V), 5 kW S1 (3×400 V), 3 kW S1 (1×230 V)
Scoring Motor Output	0.75 kW S1
Net / Gross Weight	400 / 460 kg
Package Size	1300 × 1000 × 1100 mm

ELITE
WOODWORKING MACHINERY

MACHINE
Specification

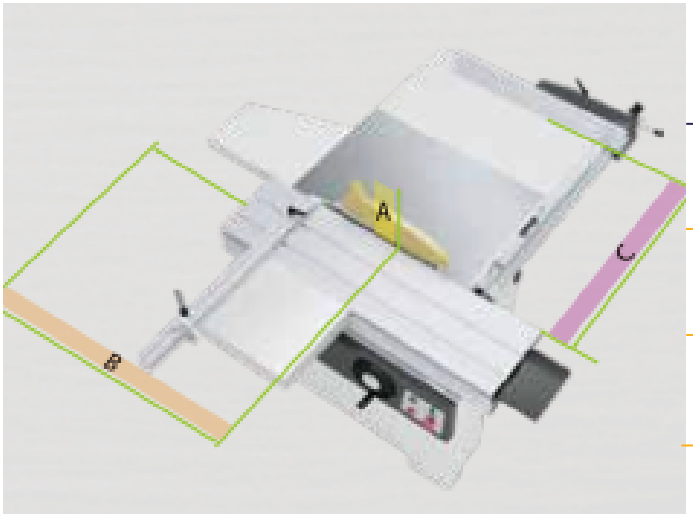


Key Capacity

Max Depth of Cut: 95 mm

Sliding Beam Cutting Capacity: 1250 mm

Max Rip Capacity: 900 mm

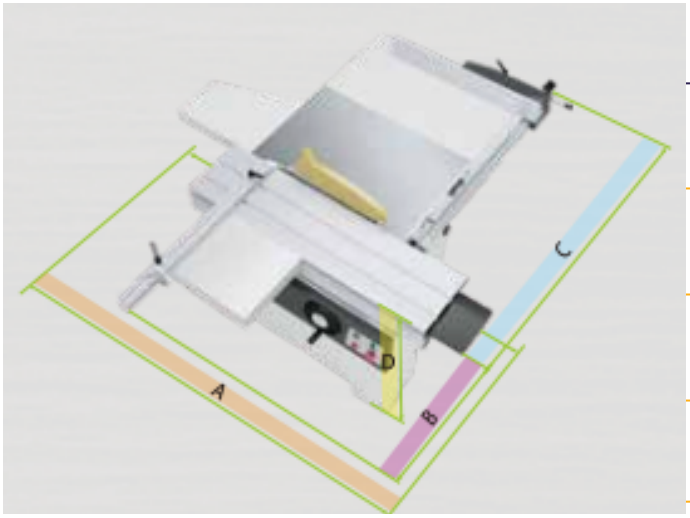

Layout Dimensions

A: 2550 mm

B: 920 mm

C: 1110 mm

D: 860 mm

ELITE
WOODWORKING MACHINERY

12” JUMBO PANEL SAW

PROFESSIONAL CUTTING
FOR SMALL WORKSHOPS

The **EWM 12" Panel Saw** is a solid, professional-quality panel saw designed for schools and workshops that need dependable performance when working with full-size panels up to 3200mm. Its stable chassis and smooth sliding beam system provide the control and accuracy required for consistent, clean cutting in day-to-day classroom or production settings.

With motorised blade rise and tilt for straightforward operation, the **EWM 12" Panel Saw** supports safe, confident use while helping achieve precise results across a wide range of woodworking tasks.

The **EWM 12" Panel Saw** is available with a selection of reliable 3-phase motor configurations, giving workshops the flexibility to choose the power level that best suits their daily cutting demands.



+35316991516

www.elitewoodworkingmachinery.ie

ELITE
WOODWORKING MACHINERY

MACHINE
Features




Dual shaft slides saw unit gives extra support for stability and lack of vibration



Large section profile cross cutting fence with reversible fence stops



Reversible saw fence for folding away table for sawing large panels

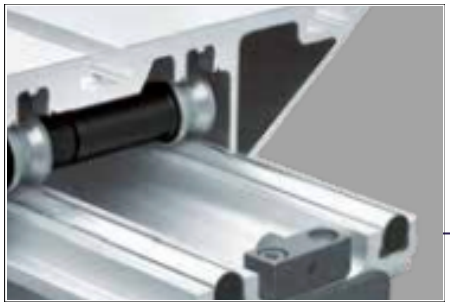

Roller guide sliding guarantees smooth and precision sliding cutting

ELITE
WOODWORKING MACHINERY

THE HEAVY-DUTY STEEL CHASSIS AND CAST-IRON TABLE PROVIDE VIBRATION-FREE CUTTING, ENSURING CLEAN, ACCURATE RESULTS ON LONG PANELS.



THE SLIDING BEAM SYSTEM AND REVERSIBLE FENCE DESIGN OFFER PRECISION, FLEXIBILITY, AND EFFICIENCY FOR PROFESSIONAL PANEL PROCESSING


ELITE
WOODWORKING MACHINERY

TECHINICAL
Specifications

Main Blade Diameter	315 mm
Main Blade Speed	4500 rpm
Scoring Blade Diameter	120 mm
Scoring Blade Speed	8000 rpm
Blade Tilt	0–45°
Max Depth of Cut @ 45°	67 mm
Max Depth of Cut @ 90°	95 mm
Max Rip Capacity	1250 mm
Sliding Beam Size	Standard 3200 × 360 mm, Options 2200 / 2600 / 3800 × 360 mm
Sliding Beam Cutting Capacity	Standard 3200 mm, Options 2200 / 2600 / 3800 mm
Blade Rising	Manual Rised (Standard), Motor Rised (Option)
Blade Tilting	Manual Tilting (Standard), Motor Tilting (Option)
Table Size	800 (530 + 820) mm
Dust Extraction Outlet	120 mm
Main Motor Output	4 kW S1 (3×400 V), 5 kW S1 (3×400 V)
Scoring Motor Output	0.75 kW S1
Net / Gross Weight	360 / 480 kg

ELITE
WOODWORKING MACHINERY

MACHINE
Specification

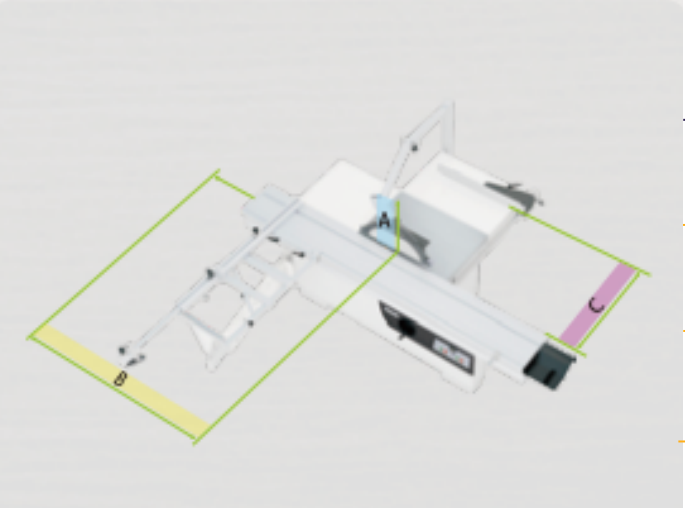


Key Capacity

Max Depth of Cut: 95 mm

Sliding Beam Cutting Capacity: 3200 mm

Max Rip Capacity: 1250 mm

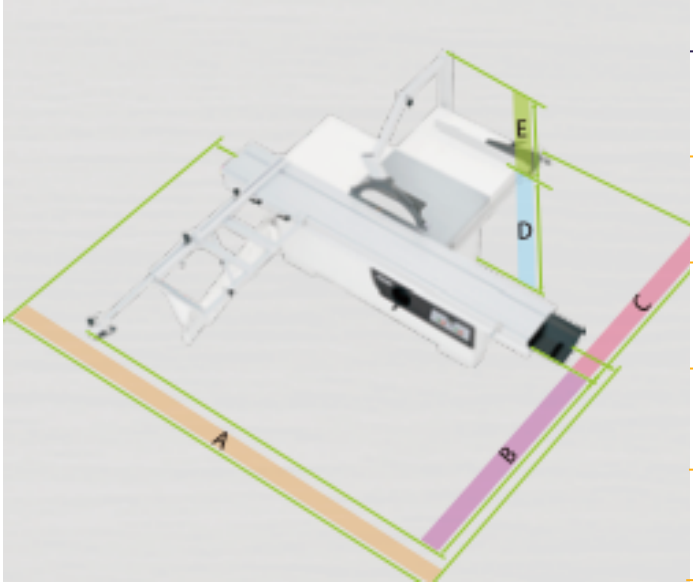

Layout Dimensions

A: 6700 mm

B: 3900 mm

C: 1510 mm

D: 860 mm

E: 640 mm

ELITE
WOODWORKING MACHINERY

16” PLANER/THICKNESSER

PRECISION SURFACING & CONSISTENT THICKNESSING PERFORMANCE



The **EWM 16" Planer Thicknesser** combination machine is a reliable tool for educational and light professional woodworking. It features a strong motor, precision components, adjustable depth settings, a spacious work table, and safety features, making it suitable for all skill levels.

Ideal for achieving smooth surfaces and uniform thickness, this EWM 16" Planer Thicknesser offers dependable performance with its large 410 x 225mm capacity.


With the convenience of single handed table lift (no need to remove fence), switching from surface planning to thicknessing cannot be easier. This versatile machine features an extra large aluminium extruded fence with centered controls and cam locking for quick adjustments.

ELITE
WOODWORKING MACHINERY

MACHINE
Features




Single handed table lift, with aluminum extruded fence

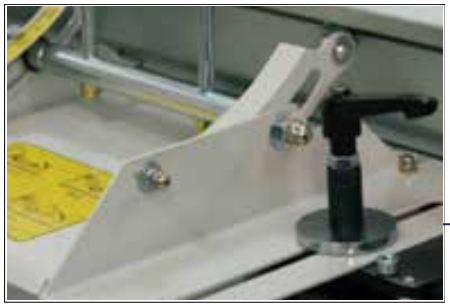

Centred control with cam locking fence for quick adjustment



Sturdy control panel for superior stability and accuracy

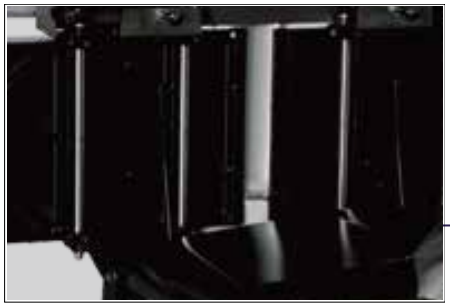

Built-in dust chute capable of handling both planing and thicknessing operations

ELITE
WOODWORKING MACHINERY

THE SINGLE-HANDED TABLE LIFT SYSTEM ALLOWS FAST CHANGEOVER BETWEEN SURFACING AND THICKNESSING WITHOUT REMOVING THE FENCE, MAKING OPERATION QUICK AND CONVENIENT FOR ANY WORKSHOP.



THE EXTRA-LARGE ALUMINIUM EXTRUDED FENCE WITH CENTRED CONTROLS AND CAM-LOCKING PROVIDES STABLE, PRECISE ADJUSTMENTS, WHILE THE DOUBLE DUST EXTRACTION OUTLETS ENHANCE COLLECTION EFFICIENCY DURING CONTINUOUS USE.


ELITE
WOODWORKING MACHINERY

TECHINICAL
Specifications

Feed speed	7 m/min
Cutterblock speed	5500 RPM
Cutterblock diameter	70 mm
Cutterhead	Straight Knives × 3 (410 mm × 30 mm × 3 mm)
Max thicknesser height	225 mm
Max thicknesser width	410 mm
Min working piece length	160 mm
Max depth of cut	4 mm
Thicknesser table length	650 mm × 407 mm
Extractor port diameter	120 mm
Cutting motor output	3 kW
Weight	294 kg
Dimensions	1002 mm × 1659 mm × 1350 mm

ELITE
WOODWORKING MACHINERY


MACHINE
Specification

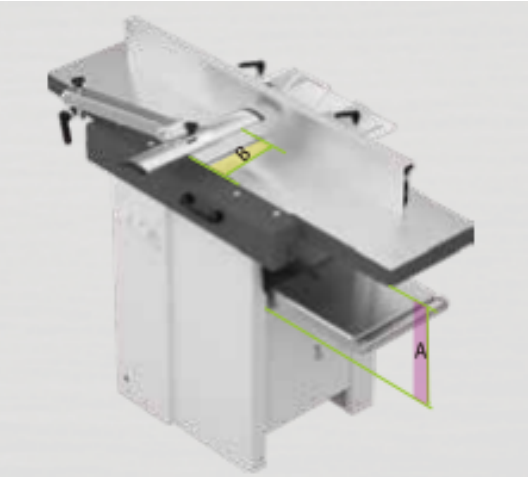

Key Capacity

A Max Depth of Cut: 225mm

B Max Thicknesser Width: 410mm

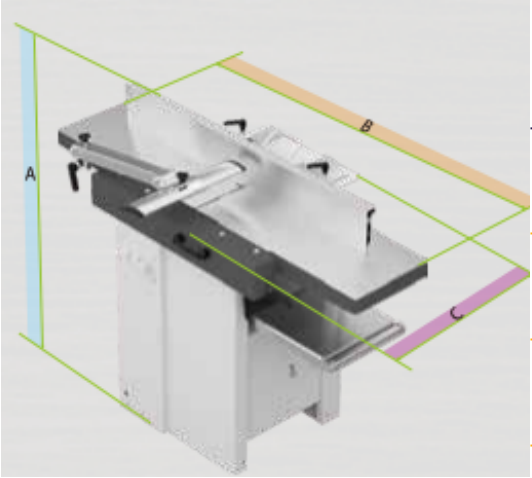

Layout Dimensions

A: 1030mm

B: 550mm

C: 1550mm

ELITE
WOODWORKING MACHINERY

EWM 18” X 24” LATHE

DESIGNED FOR POWER, STABILITY AND PROFESSIONAL WOODTURNING

Eww 18” Lathe – 18" X 24" offers woodturners a variety of new features that make it the most versatile lathe in HBW’s line. Constructed of heavy cast iron, the bed, classically shaped legs, headstock, tailstock and tool rest assembly provide over 170kgs of stability when turning.

The newly designed headstock can swivel 180 degrees for outboard turning!

The lathe has 3 additional machined surfaces on the sides of the bed to mount this special bed extension that increase the turning options even further and give the need for working on the largest bowls or oversized spindle projects.



+35316991516

www.elitewoodworkingmachinery.ie

ELITE
WOODWORKING MACHINERY

MACHINE
Features



Inverter controlled 2HP powerful motor give the craftsman the consistency needed when turning projects



Lathe Bed Has Machined Ends and Front for Adding Extensions to Increase Turning Capabilities



Swivel Headstock with Spindle lock & indexing



Extra Tool Storage inside Tailstock

ELITE
WOODWORKING MACHINERY

THE INVERTER-CONTROLLED 2HP MOTOR PROVIDES CONSISTENT POWER DURING TURNING, WHILE THE MACHINED LATHE BED ENDS AND FRONT SURFACES ALLOW EXTENSIONS TO INCREASE TURNING CAPACITY.



THE SWIVEL HEADSTOCK WITH SPINDLE LOCK AND INDEXING ENHANCES TURNING FLEXIBILITY, AND THE BUILT-IN TOOL STORAGE INSIDE THE TAILSTOCK IMPROVES CONVENIENCE IN THE WORKSHOP.


ELITE
WOODWORKING MACHINERY

TECHINICAL
Specifications

Motor Power	P1 Input: 2-1/2 HP / P2 Output: 2 HP
Spindle Speed Ranges	3 ranges: 50–900 / 100–1850 / 200–3850 rpm
Swing Over Bed	457 mm
Swing Over Tool Rest	349 mm
Working Distance Between Centers	610 mm
Tool Rest Post Diameter	1”
Headstock Taper	MT2
Tailstock Taper	MT2
Ram Travel	115 mm
Indexing Positions	24
Bottom of Base to Spindle	1100 mm
Spindle Nose	Standard: M33 × 3.5 mm / Options: M30 × 3.5 mm, 1-1/4” × 8 TPI
Tool Rest	12” standard / Optional: 4”, 6”, 8”
Face Plate	3” standard / Optional: 6”
Net Weight	170 kgs
Gross Weight	210 kgs

ELITE
WOODWORKING MACHINERY


MACHINE
Specification

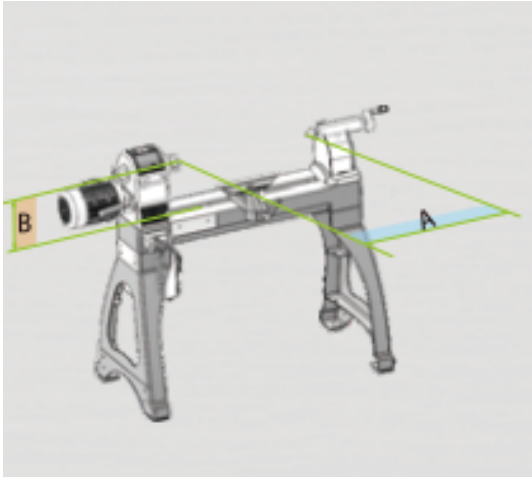

Key Capacity

Working Distance Between Centers: 610 mm

Swing Over Bed: 457 mm

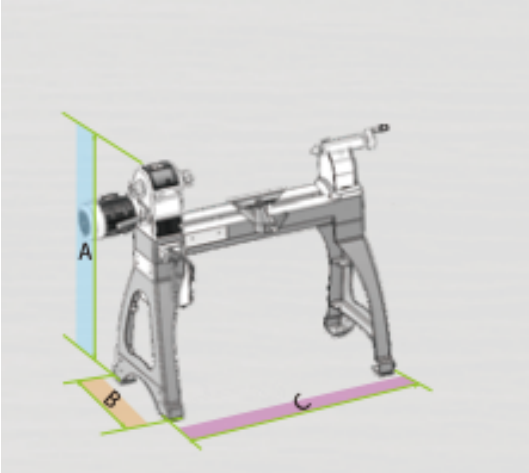

Layout Dimensions

A: 1200 mm

B: 620 mm

C: 1600 mm

ELITE
WOODWORKING MACHINERY

EWM 30” X 40” LATHE

EXPANDED TURNING CAPACITY FOR PROFESSIONAL WOODTURNERS

Eww 30” Lathe -30" X 40” LATHE features an innovative motorized sliding bed system that dramatically increases turning capacity with just the turn of a switch.

The upper bed moves smoothly to the right, away from the headstock, allowing the standard distance between centers to extend from 20” all the way to 40” without effort. This expanded capacity opens the door to larger and more ambitious turning projects.

Additionally, shifting the sliding bed increases the swing capacity from 23-7/32” to 31-1/4” over the lower bed, giving woodturners the freedom to work on substantial bowls, platters, and oversized pieces with greater comfort and clearance. Designed for versatility and ease of use, the WL3040A is ideal for turners who need both everyday practicality and the ability to take on large-format work when required.




+35316991516

www.elitewoodworkingmachinery.ie

ELITE
WOODWORKING MACHINERY

MACHINE
Features

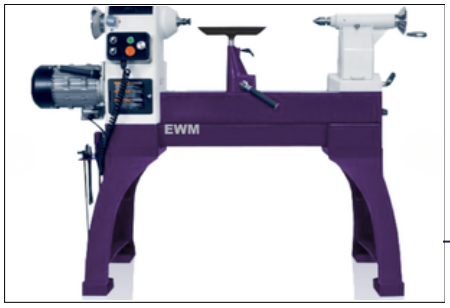

Motorized Sliding Bed – Increase spindle length 20” up to 40”



Index Head – 3-Step, multi-V pulleys include 36 index positions



Control Box – Magnetic back positions controls anywhere on long bed



Banjo – Cast iron tool rest base is extra wide and sturdy

ELITE
WOODWORKING MACHINERY

THE MOTORIZED SLIDING BED INCREASES SPINDLE LENGTH FROM 20” UP TO 40”, WHILE THE 36-POSITION INDEX HEAD WITH MULTI-V PULLEYS PROVIDES GREATER CONTROL FOR PRECISION TURNING.



THE MAGNETIC-BACK CONTROL BOX CAN BE POSITIONED ANYWHERE ALONG THE BED, AND THE EXTRA-WIDE CAST IRON BANJO ADDS STABILITY AND STRENGTH DURING EVERY PROJECT


ELITE
WOODWORKING MACHINERY

TECHINICAL
Specifications

Motor Power	P1 Input 4 HP / P2 Output 3 HP
Spindle Speed Ranges	3 ranges: 20–650 / 50–1750 / 100–3850 rpm
Swing Over Bed	590 mm to 794 mm
Swing Over Tool Rest	442 mm to 646 mm
Working Distance Between Centers	508 mm to 1016 mm
Tool Rest Post Diameter	1”
Headstock Taper	MT2
Tailstock Taper	MT2
Ram Travel	120 mm
Indexing Positions	36
Bottom of Base to Spindle	1118 mm
Spindle Nose	Standard M33 × 3.5 mm / Options: M30 × 3.5 mm, 1–1/4” × 8 TPI
Tool Rest	12” standard / Options: 4”, 6”, 8”
Face Plate	Standard 3” / Option 6”
Net Weight	248 kgs
Gross Weight	302 kgs

ELITE
WOODWORKING MACHINERY


MACHINE
Specification

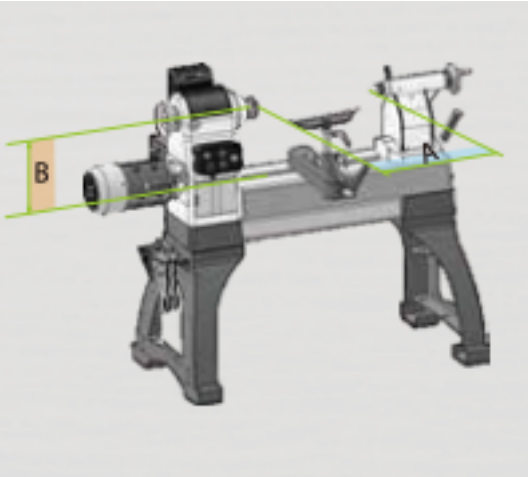

Key Capacity

Working Distance Between Centers: 1016 mm

Swing Over Bed: 794 mm

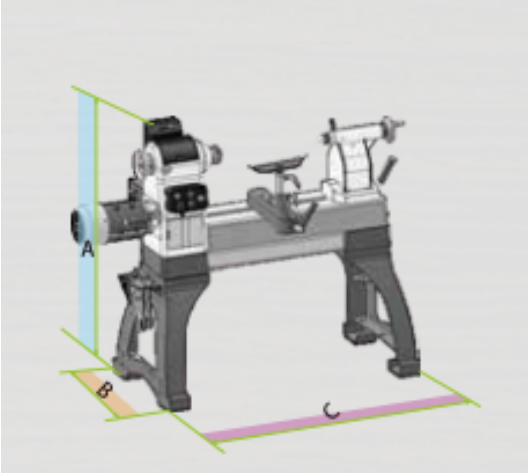

Layout Dimensions

A: 1300 mm

B: 700 mm

C: 1700 + 500 mm

ELITE
WOODWORKING MACHINERY

EWM10” X 18” BENCH TOP LATHE

EXPANDING YOUR TURNING POTENTIAL
WITH EFFORTLESS CONTROL

Ewm10” x 18" Lathe was designed at the request of pen turners who needed a sturdy, dedicated machine tailored to their craft. This compact mini lathe is built from cast iron, reducing vibration and offering greater stability compared to similar aluminum-made machines.

Its scaled-down footprint makes it ideal for small workshops or for turners who want a reliable secondary lathe for precision work, without sacrificing durability or performance.



+35316991516

www.elitewoodworkingmachinery.ie

ELITE
WOODWORKING MACHINERY

MACHINE
Features



Easy access speed change — simply move the drive belt between stepped pulleys



Easy access speed change — simply move the drive belt between stepped pulleys



Standard spindle and MT2 headstock & tailstock for compatibility with a wide range of accessories



Fast belt speed change with quiet poly-V belt

ELITE
WOODWORKING MACHINERY

THE MAGNETIC-BACK CONTROL BOX CAN BE POSITIONED ANYWHERE ALONG THE BED, AND THE EXTRA-WIDE CAST IRON BANJO ADDS STABILITY AND STRENGTH DURING EVERY PROJECT.



THE MAGNETIC-BACK CONTROL BOX CAN BE POSITIONED ANYWHERE ALONG THE BED, AND THE EXTRA-WIDE CAST IRON BANJO ADDS STABILITY AND STRENGTH DURING EVERY PROJECT.


ELITE
WOODWORKING MACHINERY

TECHINICAL
Specifications

Motor Power	P1 Input 1/2 HP, P2 Output 1/3 HP
Spindle Speed Ranges	450 / 980 / 1550 / 1940 / 2640
Swing Over Bed	254 mm
Swing Over Tool Rest	190 mm
Working Distance Between	457mm
Tool Rest Post Diameter	5/8”
Headstock Taper	MT2
Tailstock Taper	MT2
Ram Travel	44.5 mm
Indexing Positions	N/A
Bottom of Base to Spindle	300 mm
Spindle Nose	M33×3.5 mm (Standard),
Tool Rest	6” (Standard), 4” (Option), 8”
Face Plate	3” (Standard), 6” (Option)
Net Weight	32 kg
Gross Weight	34 kg

ELITE
WOODWORKING MACHINERY


MACHINE
Specification

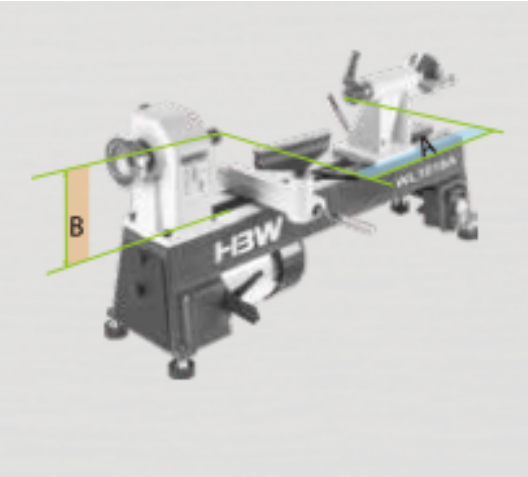

Key Capacity

Working Distance Between Centers: 457 mm

Swing Over Bed: 254 mm

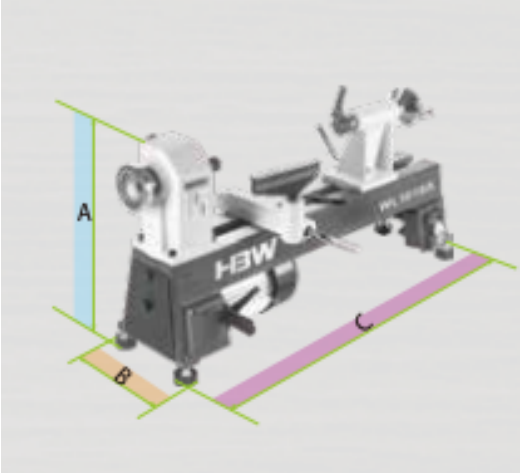

Layout Dimensions

A : 395 mm

B: 195 mm

C: 790 mm

ELITE
WOODWORKING MACHINERY

EWM14” X 20” BENCH MOUNTED LATHE

ENHANCED TURNING CAPACITY FOR LARGER, MORE VERSATILE PROJECTS

Ewm14” x 20" Lathe is the largest benchtop lathe in the HBW line, offering woodturners increased spindle-to-bed height for working with larger diameters. This upgraded model includes three machined mounting surfaces that allow optional extensions to be attached, further expanding its working dimensions.

Using the headstock’s outboard threaded spindle and the optional 13-1/2” extension, turners can gain an additional 4” of diameter capacity for bowls and platters. The same extension can be mounted on the front of the bedto safely support outside-edge turning.

When fitted with the 13-1/2” or 24” extension, the working distance between centers increases from 20” up to 44”, making the lathe suitable for longer spindle turning as well.



+35316991516

www.elitewoodworkingmachinery.ie

ELITE
WOODWORKING MACHINERY

MACHINE
Features



Lathe bed has machined ends and front for adding extensions to increase turning capabilities



Powerful 1-1/2 HP DC brushless motor and variable control system



Powerful 1-1/2 HP DC brushless motor and variable control system



Powerful 1-1/2 HP DC brushless motor and variable control system

ELITE
WOODWORKING MACHINERY

THE THREE MACHINED MOUNTING SURFACES ALLOW EXTENSIONS TO BE ADDED, INCREASING BOTH TURNING DIAMETER AND WORKING LENGTH FOR GREATER PROJECT FLEXIBILITY.



THE POWERFUL BRUSHLESS MOTOR AND VARIABLE SPEED CONTROL DELIVER SMOOTH, CONSISTENT PERFORMANCE ACROSS A WIDE RANGE OF TURNING APPLICATIONS.


ELITE
WOODWORKING MACHINERY

TECHINICAL
Specifications

Motor Power	P1 Input 1-1/2 HP, P2 Output —
Spindle Speed Ranges	3 ranges (150–650 / 400–1550 / 850–3850)
Swing Over Bed	355 mm
Swing Over Tool Rest	270 mm
Working Distance Between	508 mm
Tool Rest Post Diameter	1”
Headstock Taper	MT2
Tailstock Taper	MT2
Ram Travel	102 mm
Indexing Positions	24
Bottom of Base to Spindle	388 mm
Spindle Nose	M33×3.5 mm (Standard),
Tool Rest	8” (Standard), 4” & 12” (Options)
Face Plate	3” (Standard), 6” (Option)
Net Weight	62 kg
Gross Weight	68 kg
Shipping Carton	1005 × 525 × 288 mm
20’ Container Qty	176 / 140 (with pallets)

ELITE
WOODWORKING MACHINERY


MACHINE
Specification

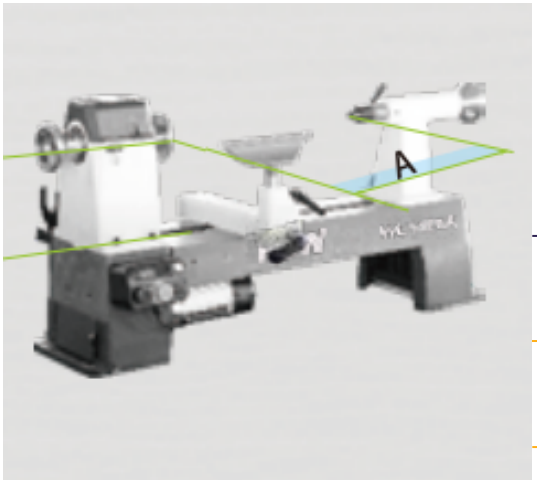

Key Capacity

Working Distance Between Centers: 508 mm

Swing Over Bed:355 mm

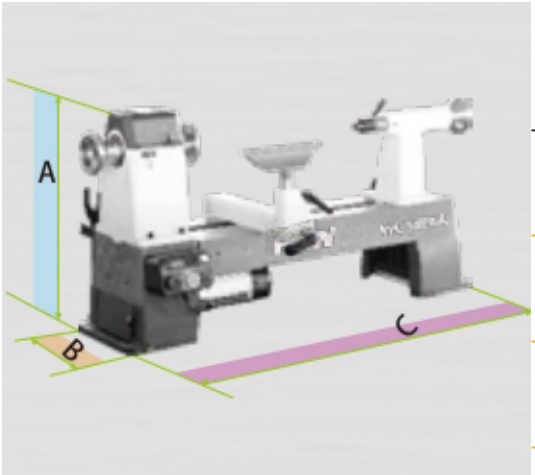

Layout Dimensions

A: 470 mm

B: 470 mm

C: 1100 mm

ELITE
WOODWORKING MACHINERY

MID-SIZE CNC ROUTER

PRECISION & FLEXIBILITY FOR SMALL-SCALE PRODUCTION

The **EWM Mid Size CNC Router** features a heavy duty aluminium frame, powerful
3 hp spindle, and handheld controls delivering full-scale precision in a desktop scale. Designed with small scale production in mind, this machine is engineered to cut many types of materials including wood, plastics, composites, aluminium & foam. It can perform a tremendous range of tasks including intricate 3D carvings, furniture components, cabinet door panels, mouldings, joinery, sign boards, picture frames, engineering prototypes, woodcrafts & more.



+35316991516

www.elitewoodworkingmachinery.ie

ELITE
WOODWORKING MACHINERY

MACHINE
Software

This machine is compatible with CAM software including VCarve Desktop, VCarve Pro, Vectric Aspire and more.
The software can import 2D designs from other programs and also includes a complete set of drawing and editing tools.


It offers toolpath options for all common 2D routing operations such as profiling, pocketing, auto-inlays and drilling, as well as 2.5D strategies including V-carving, prism carving, moulding toolpaths, fluting and decorative texturing. For 3D work, you can rough and finish the model, and you can also project 2D or 2.5D toolpaths onto a 3D surface.



Every toolpath includes detailed settings that allow you to customise the operation and maintain full control. All toolpaths can be previewed, giving a clear simulation of how the part will look once cut. This provides immediate feedback and helps optimise toolpaths quickly and effectively.

ELITE
WOODWORKING MACHINERY


MACHINE
Features

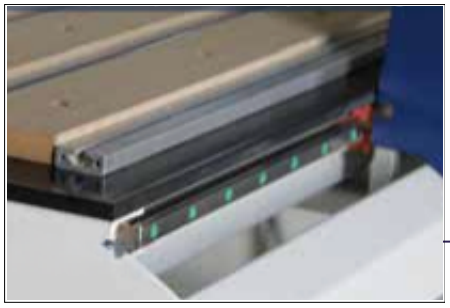


Heavy duty frame with side mounted linear guide ensures optimal precision for your routing needs



Handheld controller is easy to program, adjust, and run your CNC from the palm of your hand

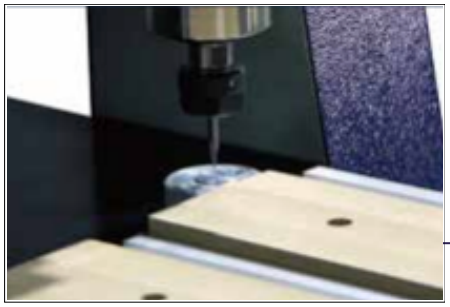

Built-in tool setter for quickly and easily re-zero the Z axis

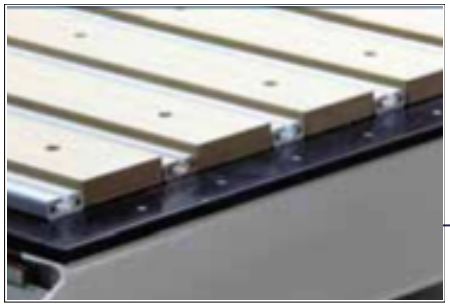

Work surface w/Spoilboard and integrated T-slots allow clamps to be positioned in multiple locations

ELITE
WOODWORKING MACHINERY

THE HEAVY-DUTY FRAME WITH SIDE-MOUNTED LINEAR GUIDE ENSURES OPTIMAL PRECISION, WHILE THE HANDHELD CONTROLLER MAKES IT EASY TO PROGRAM, ADJUST, AND RUN THE CNC FROM THE PALM OF YOUR HAND.



THE BUILT-IN TOOL SETTER ALLOWS QUICK AND EASY RE-ZEROING OF THE Z AXIS, AND THE WORK SURFACE WITH SPOILBOARD AND INTEGRATED T-SLOTS LETS CLAMPS BE POSITIONED IN MULTIPLE LOCATIONS.

ELITE
WOODWORKING MACHINERY

TECHINICAL
Specifications

X-axis	915 mm
Y-axis	610 mm
Z-axis	140 mm
Rapid Travel Speed	3.5m/min
X Axis Precision Linear Guideway Size	20mm
Y/Z Axis Precision Linear Guideway Size	15mm
Precision ball diameter	16 mm
Resolution	+/- 0.1mm
Spindle Power	2.2kW / Air Cooled
Spindle Speeds	0-24000 rpm
Controller	Remote 4 Axis Controller
Table Size	1350x790mm
Net Weight	195kg

ELITE
WOODWORKING MACHINERY

MACHINE
Specification



Key Capacity

A Max Depth of Cut: 140mm

B Throat Width: 915mm



Layout Dimensions

A: 1050mm

B: 950mm

C: 1460mm

D: 570mm

ELITE
WOODWORKING MACHINERY

MACHINE
Specification



Enclosure Dimensions

1050 x 1550x780 mm

65/105 Kg



Cabinet Stand Dimensions

800 x 1350 x 470 mm

140 / 180 Kg

ELITE
WOODWORKING MACHINERY

EWM SPINDLE MOULDER

PRECISION MOULDING PERFORMANCE
FOR THE PROFESSIONAL WORKSHOP

The **EWM Spindle Moulder** offers a dependable and versatile shaping solution, built to meet the demands of both professional and educational workshops.

Constructed with a precision-ground cast iron bed and engineered for accuracy, this machine provides smooth operation across a wide range of moulding applications. Its four-speed pulley system accommodates a variety of tooling types, from small blocks to large panel cutters up to Ø200mm, making it a highly flexible asset in a school environment.

With a solid structure, intuitive controls, and a generous table surface, the **EWM Spindle Moulder** delivers consistency, safety, and performance – all in one robust package.




+35316991516


www.elitewoodworkingmachinery.ie

ELITE
WOODWORKING MACHINERY

MACHINE
Features

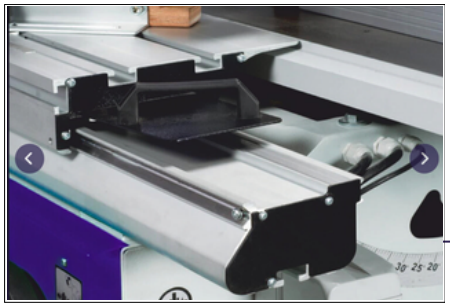


The 1200 mm aluminium sliding table is precision and for ultra-smooth gliding

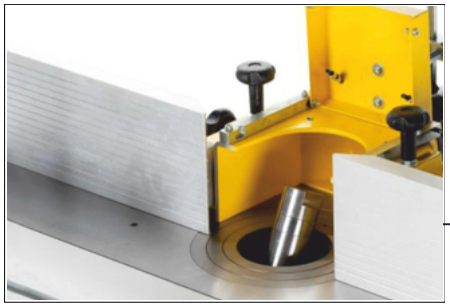

Workpieces will glide over the cast iron table, which is precision ground for accuracy & longevity



Easily lock the spindle at any angle between -5° to +45°

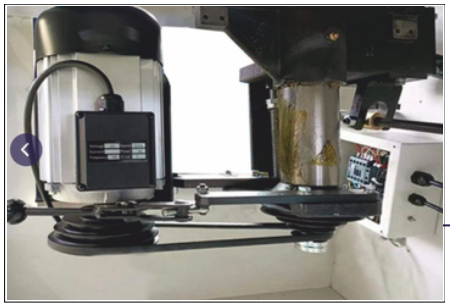

The 4 speed range allows different tooling to be used, from small blocks to larger panel feeding cutters up to 200 mm diameter

ELITE
WOODWORKING MACHINERY

THE PRECISION-GROUND CAST-IRON TABLE AND FULLY ADJUSTABLE SPINDLE PROVIDE SUPERIOR CONTROL AND ACCURACY FOR ALL PROFESSIONAL MOULDING TASKS.



THE FOUR-SPEED SPINDLE RANGE AND COMPATIBILITY WITH A WIDE VARIETY OF TOOLING OFFER FLEXIBILITY FOR BOTH SMALL DETAIL WORK AND LARGE PANEL CUTTERS.


ELITE
WOODWORKING MACHINERY

TECHINICAL
Specifications

Spindle Diameter	30 mm (options: 32 / 35 / 40 / 50 mm)
Spindle Speeds	1400 / 3500 / 6000 / 8000 rpm
Max Spindle Stroke	140 mm
Spindle Length	130 mm
Spindle Tilting	-5° to +45°
Max Diameter of Table Opening	220 mm
Max Tool Diameter Under the Table	175 mm
Max Tool Diameter Above the Table	200 / 250 mm
Height of Table	890 mm
Max Height of Machine	1300 mm
Table Size	1000 × 350 mm
Suction Dust Hood Diameter	100 mm
Motor	3 kW S6 (1×230 V), 4 kW S6 (3×400 V)
Net / Gross Weight	235 / 280 kg

ELITE
WOODWORKING MACHINERY


MACHINE
Specification

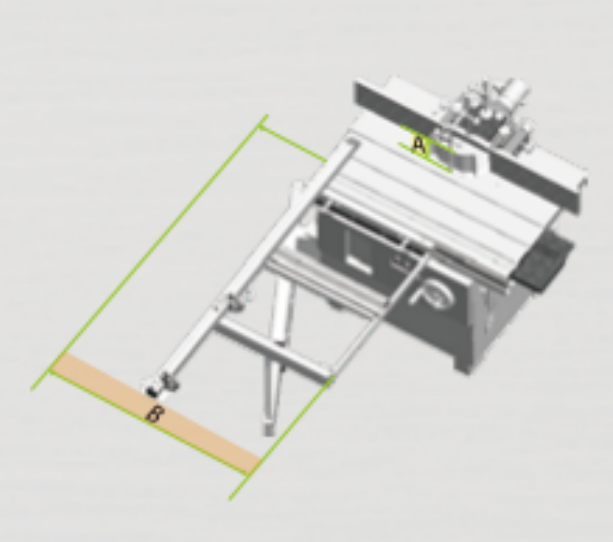

Key Capacity

Max Depth of Cut: 140 mm

Max Width of Cut: 610 mm

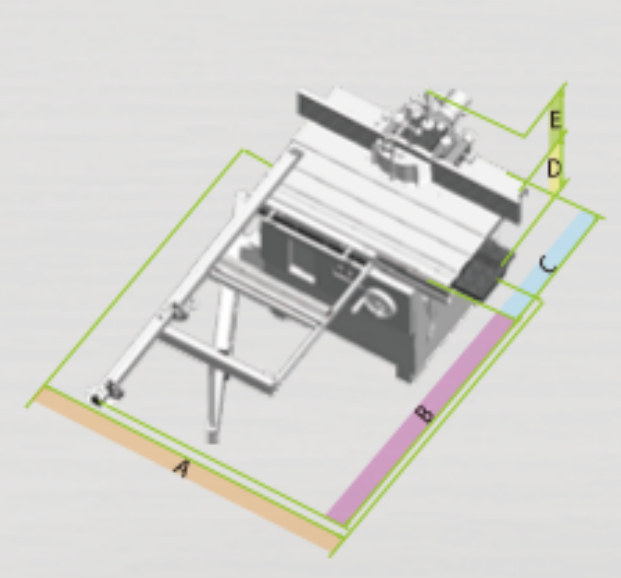

Layout Dimensions

A: 1000 mm

B: 1400 mm

C. 1400 mm

D: 950 mm

E: 550 mm

ELITE
WOODWORKING MACHINERY

EWM DRILL PRESS

HEAVY-DUTY DRILLING POWER WITH SMOOTH VARIABLE SPEED CONTROL

The **EWM 17" Variable Speed Drill Press** is a powerful, reliable solution for medium to heavy-duty drilling tasks. With a robust 1.5HP motor, full 6" spindle travel, and a variable speed drive system, this model is engineered to deliver consistent performance in school workshops and training environments.

Its easy-to-use speed adjustment dial offers precise control, while the large cast iron base and column ensure stability during operation. Integrated LED work lighting and a user-oriented table design make this machine ideal for repeated, accurate drilling supporting both student learning and instructor confidence.



+35316991516


www.elitewoodworkingmachinery.ie

ELITE
WOODWORKING MACHINERY


MACHINE
Features



Full 6” spindle travels

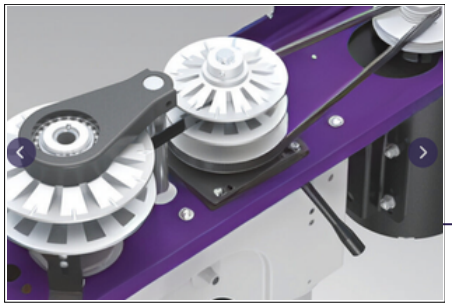

Powered by an efficient 1.5 HP motor and variable speed drive system

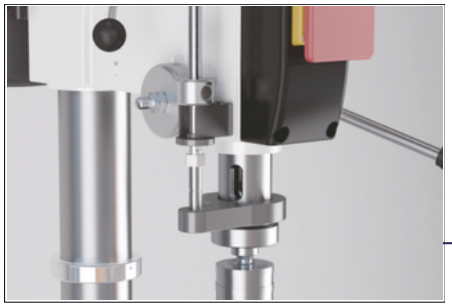

Depth stop makes repetitive drilling quick and easy



Table edge lip designed to make clamping easy

ELITE
WOODWORKING MACHINERY



THE VARIABLE SPEED DRIVE SYSTEM AND 1.5 HP MOTOR PROVIDE SMOOTH, CONSISTENT POWER FOR ACCURATE DRILLING ACROSS A WIDE RANGE OF MATERIALS.

THE FULL 6” SPINDLE TRAVEL, LARGE WORK TABLE, AND PRECISION DEPTH STOP MAKE THIS DRILL PRESS IDEAL FOR HEAVY-DUTY AND REPETITIVE DRILLING TASKS.

ELITE
WOODWORKING MACHINERY

TECHINICAL
Specifications

Drill Capacity	25 mm
Chuck Capacity	20 mm
Collar Diameter (US/EU)	66 / 72 mm
Swing	17”
Spindle Taper (US/EU)	MT2 / MT3
Speed Range (50 Hz)	190–2000 rpm
Speed Range (60 Hz)	200–2200 rpm
Spindle Travel	150 mm
Column Diameter	80 mm
Rack & Pinion	Yes
Base Size	580 × 415 mm
Table Size	356 × 356 mm
Motor Power Output	1.5 HP
Height	1820 mm
Net / Gross Weight	84 / 90 kg

ELITE
WOODWORKING MACHINERY


MACHINE
Specification



Key Capacity

Spindle Travel: 152 mm

Swing: 430 mm

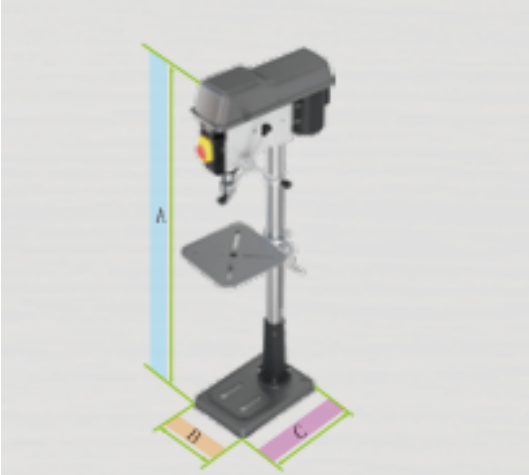

Layout Dimensions

A: 1820 mm

B: 360 mm

C: 740 mm

ELITE
WOODWORKING MACHINERY

CYCLONE DUST COLLECTOR

POWERFUL MOBILE DUST EXTRACTION
FOR WORKSHOP SAFETY

Our high-capacity cyclone dust collector is designed to efficiently remove dust and chips generated during cutting, surfacing, sanding, and boring. Whether installed in a school workshop or a professional manufacturing setting, the EWM Cyclone Dust Collector provides powerful and reliable dust extraction to protect both equipment and personnel.



Fitted with a newly designed impeller, this unit reduces stress on the motor and helps extend the overall lifespan of the machine. With a 3HP motor, 1.5µm canister filter, and up to 3,000 CFM air volume, it offers strong suction performance with improved efficiency. Its low-amp draw and cooler motor operation also contribute to lower long-term energy costs.

+35316991516

www.elitewoodworkingmachinery.ie

ELITE
WOODWORKING MACHINERY

MACHINE
Features



Collection drum with quick-release easy to dust disposal



Dust display windows for easy visibility



Casters For Mobility



Double paddle manual cleaning system quickly cleans the pleated filte

ELITE
WOODWORKING MACHINERY



THE DOUBLE-PADDLE MANUAL CLEANING SYSTEM QUICKLY CLEANS THE PLEATED FILTER, AND THE NEWLY DESIGNED IMPELLER REDUCES MOTOR STRESS, IMPROVES EFFICIENCY, AND EXTENDS MOTOR LIFE.

ELITE
WOODWORKING MACHINERY

TECHINICAL
Specifications

Motor	2.5 HP
Motor Speed	2880 RPM
Airflow	2080 m^3/hr @ 6”
Max. Static Pressure	3027 Pa
Inlets	3 × 100 mm
Drum Capacity	175 litres
Canister Filter Surface Area	8 m^2
Dimensions	1990 × 1270 × 753 mm
Weight	122 kg
Motor	2.5 HP

ELITE
WOODWORKING MACHINERY

BELT DISC SANDER

POWERFUL PERFORMANCE FOR CONSISTENT, PRECISE SANDING

The BD0610A is a large and robust belt/disc sander engineered for stability, accuracy and long-term performance. Built on a durable cast iron base, the machine minimizes vibration during operation, ensuring smoother sanding results and greater control. Its powerful motor delivers consistent performance across a wide range of sanding applications, while the wide abrasive belt and 10" disc provide generous working surfaces for shaping, smoothing and material preparation. Designed for workshops that require dependable sanding capacity, the BD0610A excels in environments where both precision and durability are essential.



+35316991516

www.elitewoodworkingmachinery.ie

ELITE
WOODWORKING MACHINERY

MACHINE
Features



Quick belt tension for easy belt changes



Ample 10” disc sander provides enough sanding surface



Belt placed from horizontal to vertical to meet your sanding needs

ELITE
WOODWORKING MACHINERY

QUICK BELT TENSION SYSTEM ALLOWS FAST AND EASY BELT CHANGES, AND THE AMPLE 10” DISC SANDER PROVIDES A LARGE, RELIABLE SANDING SURFACE FOR DAILY WORK.



THE BELT CAN BE POSITIONED FROM HORIZONTAL TO VERTICAL TO MEET A WIDE RANGE OF SANDING NEEDS, PROVIDING FLEXIBILITY AND CONTROL FOR DIFFERENT APPLICATIONS.

ELITE
WOODWORKING MACHINERY

TECHINICAL
Specifications

Motor Power	3/4 HP
Table Size	355 x 203 mm
Table Tilt	±0–45°
Disc Diameter	254 mm
Disc Speed	1420 rpm
Belt Size	150 x 1220 mm
Belt Speed	517 m/min
Belt Tilt	0–90°
Dust Ports	63 mm
Overall Dimension	406 x 718 x 438 mm
Net Weight	47 kgs
Gross Weight	50 kgs

ELITE
WOODWORKING MACHINERY

AIR CLEANER

KEEP YOUR WORKSHOP AIR CLEAN, SAFE AND DUST-FREE

Air Filtration Keeps Your Shops Air Breathable! AC060A is designed for smaller workshops. It can replace the air of a 20' × 20' × 8' workshop room more than 8 times/hr with 450CFM. AC180A is designed for handling large rooms and intense dust. It can replace the air of a 20' × 20' × 8' workshop room more than 22 times/hr with 1100CFM.

They can be ceiling-mounted for general air circulation or positioned on a workbench for more focused filtration.



The two-stage system pairs an outer filter that traps particles 5 microns or larger with an inner pleated filter back that catches particles as small as 1 micron in diameter.

Quick-release clips let you open it to clean or replace the filters without using tools.

.

ELITE
WOODWORKING MACHINERY


MACHINE
Features



Convenient Remote



Quick Release Latch System

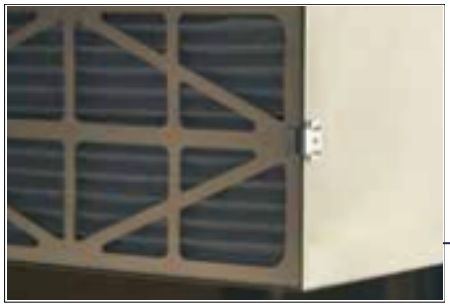

Easily Mounted On Work Bench Or
Mounted From Ceilings



3 Timer Settings 1, 2 Or 4 Hours

ELITE
WOODWORKING MACHINERY

CONVENIENT REMOTE CONTROL AND QUICK-RELEASE LATCH SYSTEM PROVIDE EASY OPERATION AND FAST ACCESS FOR CLEANING OR FILTER CHANGES.



THE UNIT CAN BE MOUNTED ON A WORK BENCH OR FROM CEILINGS, AND FEATURES 1, 2, OR 4-HOUR TIMER SETTINGS FOR FLEXIBLE AIR CLEANING MANAGEMENT.

ELITE
WOODWORKING MACHINERY

TECHINICAL
Specifications

Motor Power	3/4 HP
Air Flow	952, 1275, or 1870 m³/hr
Filter Size	305 x 610 x 25 mm
Filter (Microns)	Outer 5, Inner 1
Sound Rating on High	<73 dB
Timer Settings	1, 2, or 4 Hour Segments
Cleans	(uses same room size reference as AC060A)
Overall Size	705 x 622 x 305 mm
Net Weight	27.4 Kgs
Gross Weight	29.7 Kgs

ELITE
WOODWORKING MACHINERY

HANDSAFE SYSTEM

AI-Controlled Safety Technology

OPTIONAL EXTRAS

The H**andsafe System** is an innovative solution designed to prevent serious hand injuries in woodworking environments. Using AI and image processing, it detects hands or knuckles in the danger zone and **automatically stops the machine** — all **without physical contact**.

It integrates easily into a wide range of machines, such as bandsaws, spindle moulders and planers, offering an extra layer of protection with **no impact on productivity**.

Your hands are now safe. We have eliminated risks — without touching the hand.





ELITE
WOODWORKING MACHINERY


How it works?


Handsafe uses **artificial intelligence and image processing** to detect the hand or knuckles before they enter the danger zone.


The system **automatically stops** the machine the moment a hand is detected in the hazardous area. It tracks the position of knuckles, not hand shape or skin tone, and works from any angle.

Detection remains stable and accurate regardless of hand position.

⚠️ **Please note: The system does not detect gloves.**

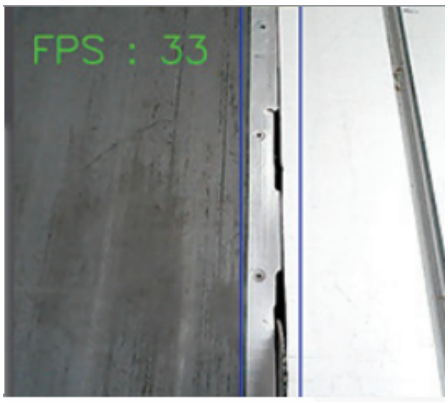

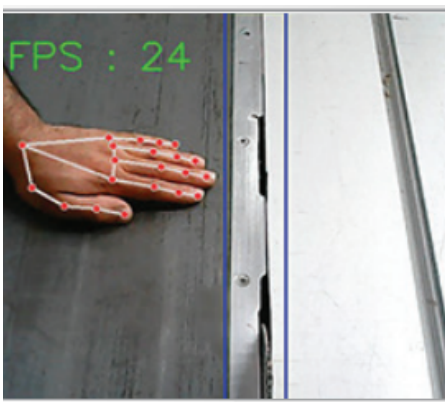

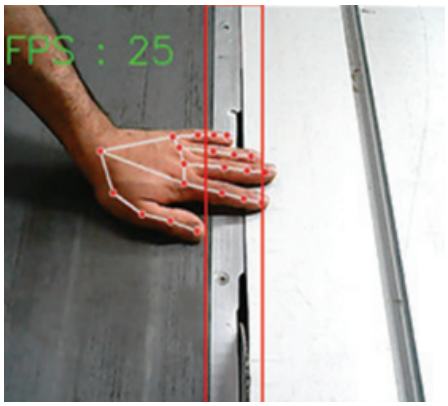

ELITE
WOODWORKING MACHINERY

System Components



- Embedded PC
- Industrial camera
- 21.5” monitor with touchscreen
- Control cabinet with interface
- PLC emergency stop connection
- Image-processing software
- Integrated power supply and cooling



Key Benefits

- Prevents serious hand injuries
- Instant detection without physical contact
- Maintains workflow with no downtime
- Reinforces a safe and professional work environment
- Easy to install in new or existing machines
- Demonstrates strong commitment to safety

ELITE
WOODWORKING MACHINERY



CLASS

DUST EXTRACTION

POWERFUL PERFORMANCE

The Class Dust Extractor is a high-performance, trade-grade solution engineered for demanding construction, woodworking, and industrial environments.

Designed to ensure cleaner air, safer working conditions, and improved productivity, this unit is ideal for professionals who require reliable dust management on-site or in workshops.

+35316991516

www.elitewoodworkingmachinery.ie

ELITE
WOODWORKING MACHINERY

Why Choose The
Class Dust Extraction

When selecting a dust extraction system, the most important factors are safety compliance, suction performance, filtration quality, and operational efficiency. The Trend T35A excels across all of these.

1. **Certified Safety (M-Class Standard)**
- Fully compliant with M-Class dust regulations (EN 60335-2-69)
- Suitable for hazardous dusts such as hardwood, MDF, and construction materials
- Ensures operator safety and regulatory compliance

2. Powerful Extraction Performance
- High airflow rate of 70 litres per second
- 1400W silenced motor delivers strong, consistent suction
- Ideal for continuous use with power tools

3. Advanced HEPA Filtration
- Captures particles down to 0.3 microns
- Improves air quality and reduces airborne health risks



ELITE
WOODWORKING MACHINERY

Why Choose The
Class Dust Extraction

4. Smart Auto-Start Functionality

- Automatically activates when connected tools are in use
- Includes run-on delay to clear residual dust
- Enhances efficiency and reduces manual operation

5. Wet & Dry Capability

- Handles both dust and liquid waste
- Suitable for a wide range of site and workshop applications

6. Large Capacity & Minimal Downtime

- Approx. 27L tank capacity
- Reduces frequency of emptying, improving productivit



ELITE
WOODWORKING MACHINERY

TECHINICAL

Specifications

Brushless	Brushed
Cable Length	7 m
Corded Tool Weight	7.8 kg
Extraction Rate	70 Ltr/sec
Hose Diameter	39 mm
Hose Length	5 m
Litre Capacity	27 Ltr
Max Dust Class	M Class
Overload Protection	No Overload Protection
Power Output (Watts/Kw)	1400 W
Power Supply	Electric
Power Voltage Supply	230 V
Product DImensions D x H W	430 mm x 490mm x 350mm
Product Type	Wet and Dry Dust Extractor
Wet or Dry Use	Wet & Dry Use

ELITE
WOODWORKING MACHINERY

Key Benefits

Typical Use Cases

- Dust extraction for cutting, sanding, routing, and drilling
- Workshop clean-up and maintenance
- Liquid spill recovery on-site
- Integration with power tools for source extraction

Key Benefits to Your Classroom

✔️ Improved Workplace Safety
✔️ Increased Productivity
✔️ Versatility Across Applications
✔️ Professional-Grade Reliability
✔️ Reduced clean-up time
✔️ Lower health risk exposure
✔️ Compliance with dust regulations
✔️ Long-term durability and ROI



Images









ELITE
WOODWORKING MACHINERY

WELCOME TO THE FUTURE OF

WOODWORKING

Elite Woodworking Machinery recognise that customers want to purchase machines from a reliable team that can offer a variety of specifications of machinery which will best suit their production needs and budget.

We pride ourselves on our reputation for reliability, quality of service & support.

We have a global vision to lead our industry towards environmentally sustainable growth for the economic and social well-being of our customers through the pursuit of excellence and commitment to our values

.



+35316991516

www.elitewoodworkingmachinery.ie

ELITE
WOODWORKING MACHINERY

EXTENSIVE
Knowledge

Our team of highly skilled engineers brings comprehensive knowledge and expertise to every project, ensuring the highest standards of quality and precision.

They undergo continuous training to stay updated with the latest industry advancements, prioritizing safety at every step.

This commitment to excellence extends beyond installation, as our engineers provide exceptional after-sales service, ensuring your machinery operates smoothly and efficiently. With our dedicated support, you can trust that your investment is in expert hands.



ELITE
WOODWORKING MACHINERY

WHAT
We do?



- NEW MACHINE SALES
- USED MACHINE SALES
- SERVICE &
- MAINTENANCE
- CONSULTANCY
- MACHINE
- INSTALLATION
- COMMISSIONING
- REMOTE SUPPORT
- CONSUMABLES
- EMERGENCY
- BREAKDOWN
- ASSISTANCE WHAT WE
- DO SPARE PARTS
- MACHINE MOVES

Clients choose **elite woodworking machinery** because they value the full turn key solutions our business model offers.

+35316991516

www.elitewoodworkingmachinery.ie

ELITE
WOODWORKING MACHINERY

WHY

Choose us?



TIME | full range of woodworking machinery in stock, ready for immediate dispatch. fully stocked spare parts department.



COST | machine specifications available to suit each scale of manufacturing & budget.



QUALITY | our woodworking machines have enabled our customers to achieve impeccable precision, high quality standards in the production of manufactured goods and to speed up production times.



INTERNATIONAL | offering machinery solutions using our invaluable experience both domestically & internationally.



TSUSTAINABLE | we have a global vision to lead our industry towards environmentally sustainable growth for the economic and social well-being of our customers through the pursuit of excellence and commitment to our values.



COMMERCIALLY-VIABLE | machinery such as those produced by elite woodworking machinery, have an excellent return on investment and are highly resalable.

ELITE
WOODWORKING MACHINERY

BUYERS
Guide



Make contact
Contact the elite woodworking team for your free consultation via email, phone or through facebook, instagram, linkedin.
schedule a visit to our showrooms and experience the quality of elite woodworking machinery for yourself.



Design & Prepare
Whether you are choosing one of our readily-designed structures or considering a bespoke build, one of our engineers will work closely with you to make sure your vision is clearly interpreted. your requirements and ambitions will be integrated into the design and budget of your build. you will receive a set of proposed specification and a quote for your unique build at this stage. once you are comfortable with the design, you will approve the specification as final.



Manufacturing Starts
At this point you will pay your first deposit. work can now commence on the construction of your machine purchased.



The Groundwork
While your machine is being constructed offsite, the initial site work gets underway by client, with everything from installation of groundworks, water and electrical services as required in preparation for machine's arrival.



Delivery, Installation and Beyond
When the machine is delivered to site, it is set into position, and installation & commissioning commences. Once the installation is completed & inspected by our team, you are free to do a walkthrough. Handover will take place and you can officially begin utilizing your new investment. In the event that you have any queries post-installation, our team is on hand to support you.

ELITE
WOODWORKING MACHINERY

FREQUENTLY
Asked Questions

What areas do you cover?
Our team of engineers cover the entire country of Ireland and the UK

What types of woodworking machines do you sell?
We offer a wide variety of woodworking machines, including:
CNC Routers, CNC Lathes, CNC Flat Bed, CNC Pod & Rail, Beamsaws, Auto Spray Lines, Panel Saws, Bandsaws, Planer & Thicknessers, Upcut Saws, Extraction, Lathes, Sanders & Polishers, Edge Banders, and Drying Tunnels.

How do I choose the right woodworking machine for my needs?
Choosing the right machine depends on the type of work you plan to do. For example:

- For precision cutting, a table saw may be ideal.
- For shaping wood: A CNC router could be useful.
- For large-scale projects: Production lines can be purpose built to suit your needs.

If you're unsure, our team can help guide you based on your specific requirements.

Do you offer installation and setup services?
Yes, we offer installation and setup services for all machines. Our team can help ensure your machines are properly installed and calibrated for optimal performance.

ELITE
WOODWORKING MACHINERY

Are your machines suitable for both professional and hobbyist use?

Our machines are designed to cater to large manufacturing and production facilities, where high quality, reliability heavy duty machinery is of paramount importance.

Do you offer machine maintenance or repair services?

Yes, we provide maintenance and repair services for the machines we sell. Regular servicing is recommended to keep your equipment running smoothly.

Can I see the machines in action before I buy?

Yes our showroom based in Dublin 15 carrys a wide range of equipment where you can see our machines in action (By Appointment Only). Alternatively, we may also offer online demonstrations or videos to help you understand how a machine works.

Do you offer warranties on your machines?

Yes, most of our machines come with a manufacturer's warranty. Warranty details vary depending on the product, but we can provide specific information at the time of purchase.

Do you offer financing options?

Yes, we offer flexible financing plans to help you manage the cost of your woodworking machines. Please contact us for more details.

What is the delivery process like?

We offer both local and national delivery options. Delivery timeframes will vary based on the machine's size and availability.

What safety features do your woodworking machines have?

Safety is a top priority. All our machinery complies with CE Norms. Our machines come equipped with various safety features such as:

- Blade guards
- Emergency stop buttons
- Safety switches
- Dust collection ports

We also recommend using additional personal protective equipment (PPE) such as goggles, gloves, and ear protection.

ELITE
WOODWORKING MACHINERY

📍 Unit 5, Tudor Lodge
Powerstown Road, Clonee
Dublin 15, D15 AXF4 – Ireland

📧 info@elitewoodworkingmachinery.ie
📧 spareparts@elitewoodworkingmachinery.ie